

Program de masterat „Calculatoare”

Sisteme de calcul dedicate

Lucrarea de laborator Nr. 2.

Proiectarea, programarea și simularea sistemelor de achiziție și procesare a semnalelor analogice în bază de dispozitive Microcontroler


Scopul lucrării: Proiectarea, programarea și simularea sistemelor de achiziție și procesare a semnalelor analogice implementate în bază de dispozitive Microcontroler PIC16F877 destinate pentru gestiunea proceselor continue în timp real.

Surse și medii pentru proiectare și simulare:

- Mediul de proiectare și simulare a circuitelor electronice **ISIS Proteus**;
- Mediul de programare a dispozitivelor Microcontroler **IDE microC for PIC**;
- Mediul de simulare funcțională a produselor program **PIC Simulator IDE**.

Descrierea și argumentarea dispozitivului Microcontroler:

- Repartizarea și destinația pinilor:

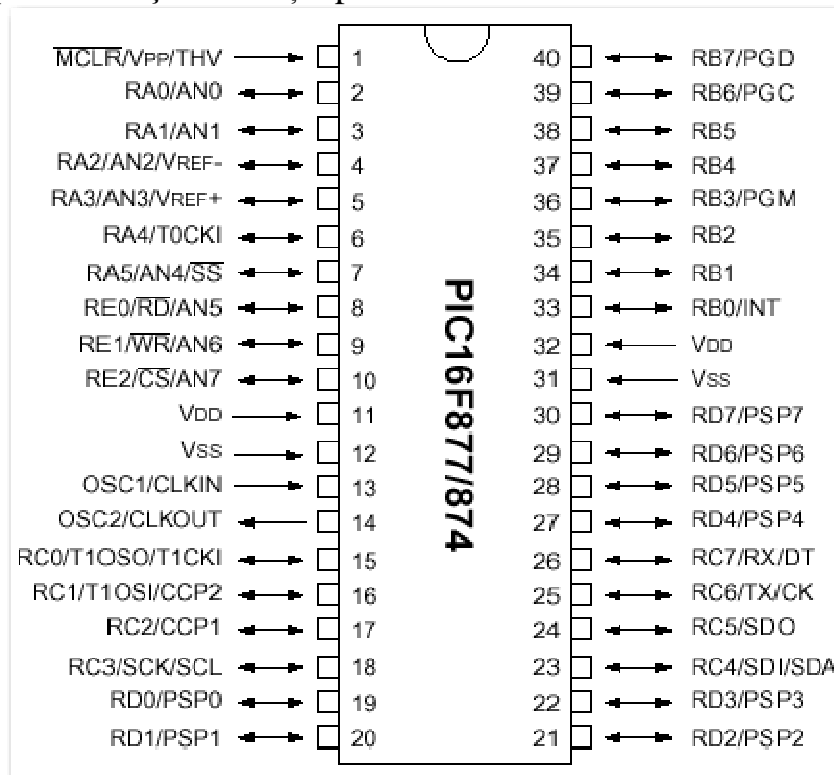


b) Date characteristic:

- High performance RISC CPU
- Only 35 single word instructions to learn
- All single cycle instructions except for program branches which are two cycle
- Operating speed: DC - 20 MHz clock input
DC - 200 ns instruction cycle
- Up to 8K x 14 words of FLASH Program Memory,
Up to 368 x 8 bytes of Data Memory (RAM)
Up to 256 x 8 bytes of EEPROM Data Memory
- Pinout compatible to the PIC16C73B/74B/76/77
- Interrupt capability (up to 14 sources)
- Eight level deep hardware stack
- Direct, indirect and relative addressing modes
- Power-on Reset (POR)
- Power-up Timer (PWRT) and
Oscillator Start-up Timer (OST)
- Watchdog Timer (WDT) with its own on-chip RC
oscillator for reliable operation
- Programmable code protection
- Power saving SLEEP mode
- Selectable oscillator options
- Low power, high speed CMOS FLASH/EEPROM
technology
- Fully static design
- In-Circuit Serial Programming™ (ICSP) via two
pins
- Single 5V In-Circuit Serial Programming capability
- In-Circuit Debugging via two pins
- Processor read/write access to program memory
- Wide operating voltage range: 2.0V to 5.5V
- High Sink/Source Current: 25 mA
- Commercial, Industrial and Extended temperature
ranges
- Low-power consumption:

c) Echipamente periferice:

- Timer0: 8-bit timer/counter with 8-bit prescaler
- Timer1: 16-bit timer/counter with prescaler,
can be incremented during SLEEP via external
crystal/clock
- Timer2: 8-bit timer/counter with 8-bit period
register, prescaler and postscaler
- Two Capture, Compare, PWM modules
 - Capture is 16-bit, max. resolution is 12.5 ns
 - Compare is 16-bit, max. resolution is 200 ns
 - PWM max. resolution is 10-bit
- 10-bit multi-channel Analog-to-Digital converter
- Synchronous Serial Port (SSP) with SPI (Master
mode) and I²C™ (Master/Slave)
- Universal Synchronous Asynchronous Receiver
Transmitter (USART/SCI) with 9-bit address
detection
- Parallel Slave Port (PSP) 8-bits wide, with
external \overline{RD} , \overline{WR} and \overline{CS} controls (40/44-pin only)

d) Structura internă a dispozitivului:

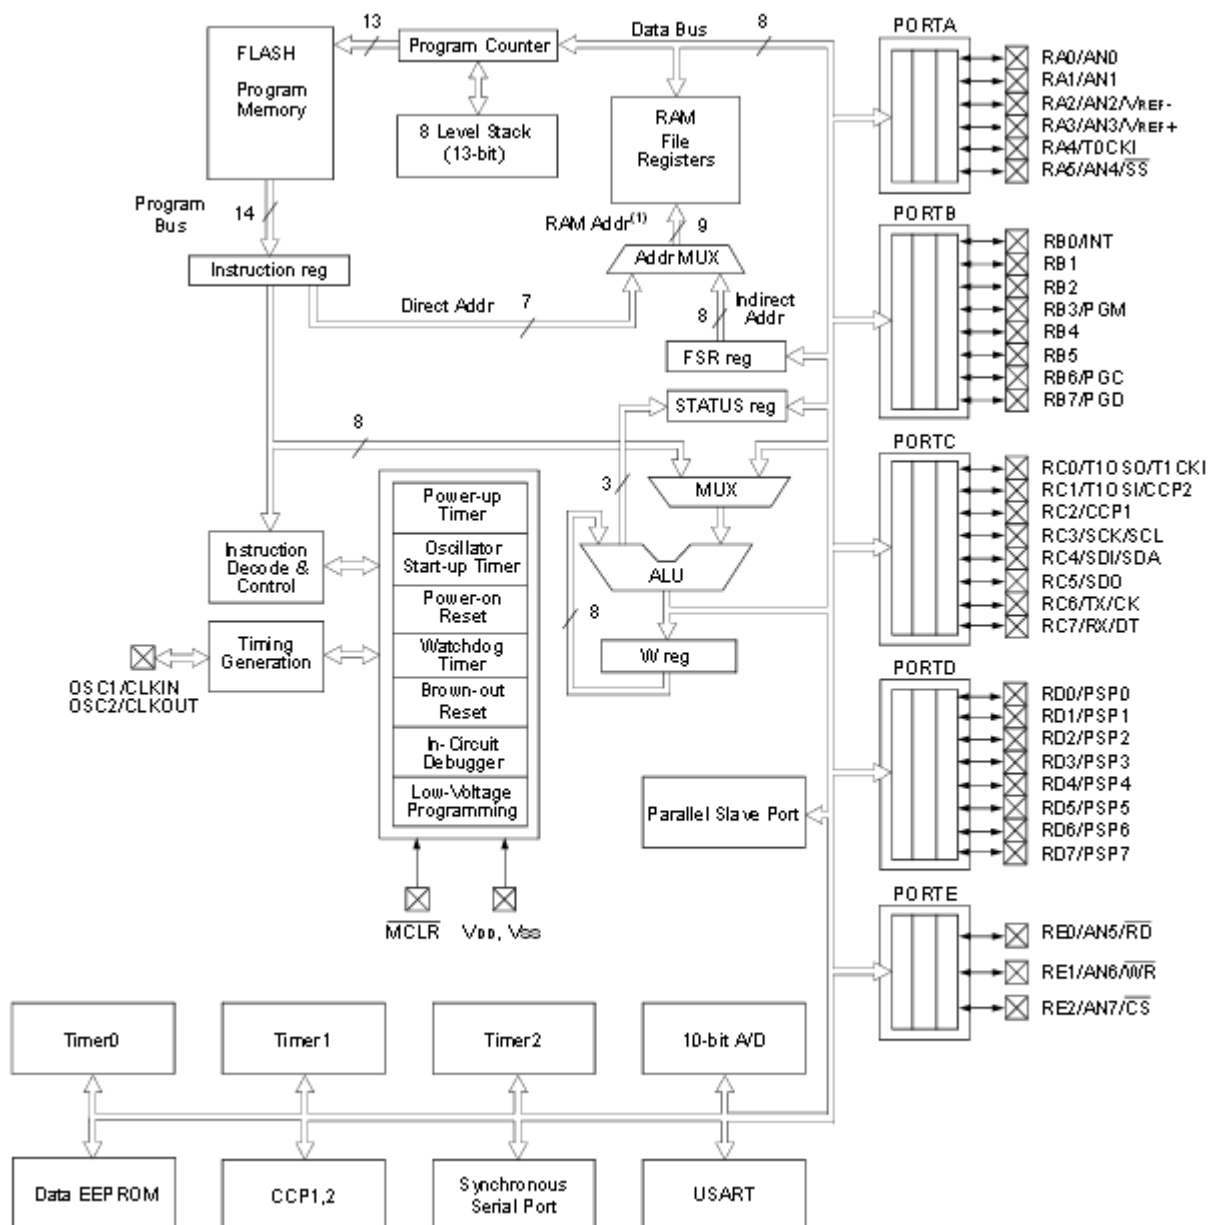

e) Descrierea funcțională a pinilor:

Pin Name	DIP Pin#	PLC C Pin#	QFP Pin#	I/O/P Type	Buffer Type	Description
OSC1/CLKIN	13	14	30	I	ST/CMOS ⁽⁴⁾	Oscillator crystal input/external clock source input.
OSC2/CLKOUT	14	15	31	O	—	Oscillator crystal output. Connects to crystal or resonator in crystal oscillator mode. In RC mode, OSC2 pin outputs CLKOUT which has 1/4 the frequency of OSC1, and denotes the instruction cycle rate.
MCLR/VPP	1	2	18	VP	ST	Master Clear (Reset) input or programming voltage input. This pin is an active low RESET to the device.
RA0/AN0	2	3	19	I/O	TTL	<p>PORTA is a bi-directional I/O port.</p> <p>RA0 can also be analog input0.</p> <p>RA1 can also be analog input1.</p> <p>RA2 can also be analog input2 or negative analog reference voltage.</p> <p>RA3 can also be analog input3 or positive analog reference voltage.</p> <p>RA4 can also be the clock input to the Timer0 timer/counter. Output is open drain type.</p> <p>RA5 can also be analog input4 or the slave select for the synchronous serial port.</p>
RA1/AN1	3	4	20	I/O	TTL	
RA2/AN2/VREF-	4	5	21	I/O	TTL	
RA3/AN3/VREF+	5	6	22	I/O	TTL	
RA4/T0CKI	6	7	23	I/O	ST	
RA5/SS/AN4	7	8	24	I/O	TTL	
RB0/INT	33	36	8	I/O	TTL/ST ⁽¹⁾	<p>PORTB is a bi-directional I/O port. PORTB can be software programmed for internal weak pull-up on all inputs.</p> <p>RB0 can also be the external interrupt pin.</p> <p>RB3 can also be the low voltage programming input.</p> <p>Interrupt-on-change pin.</p> <p>Interrupt-on-change pin.</p> <p>Interrupt-on-change pin or In-Circuit Debugger pin. Serial programming clock.</p> <p>Interrupt-on-change pin or In-Circuit Debugger pin. Serial programming data.</p>
RB1	34	37	9	I/O	TTL	
RB2	35	38	10	I/O	TTL	
RB3/PGM	36	39	11	I/O	TTL	
RB4	37	41	14	I/O	TTL	
RB5	38	42	15	I/O	TTL	
RB6/PGC	39	43	16	I/O	TTL/ST ⁽²⁾	
RB7/PGD	40	44	17	I/O	TTL/ST ⁽²⁾	

Legend: I = input

O = output

— = Not used

I/O = input/output

TTL = TTL input

P = power

ST = Schmitt Trigger input

Pin Name	DIP Pin#	PLCC Pin#	QFP Pin#	I/O/P Type	Buffer Type	Description
RC0/T10S0/T1CKI	15	16	32	I/O	ST	<p>PORTC is a bi-directional I/O port.</p> <p>RC0 can also be the Timer1 oscillator output or a Timer1 clock input.</p> <p>RC1 can also be the Timer1 oscillator input or Capture2 input/Compare2 output/PWM2 output.</p> <p>RC2 can also be the Capture1 input/Compare1 output/PWM1 output.</p> <p>RC3 can also be the synchronous serial clock input/output for both SPI and I²C modes.</p> <p>RC4 can also be the SPI Data In (SPI mode) or data I/O (I²C mode).</p> <p>RC5 can also be the SPI Data Out (SPI mode).</p> <p>RC6 can also be the USART Asynchronous Transmit or Synchronous Clock.</p> <p>RC7 can also be the USART Asynchronous Receive or Synchronous Data.</p>
RC1/T10S0/CCP2	16	18	35	I/O	ST	
RC2/CCP1	17	19	36	I/O	ST	
RC3/SCK/SCL	18	20	37	I/O	ST	
RC4/SDI/SDA	23	25	42	I/O	ST	
RC5/SDO	24	26	43	I/O	ST	
RC6/TX/CK	25	27	44	I/O	ST	
RC7/RX/DT	26	29	1	I/O	ST	
RD0/PSP0	19	21	38	I/O	ST/TTL ⁽⁸⁾	<p>PORTD is a bi-directional I/O port or parallel slave port when interfacing to a microprocessor bus.</p>
RD1/PSP1	20	22	39	I/O	ST/TTL ⁽⁸⁾	
RD2/PSP2	21	23	40	I/O	ST/TTL ⁽⁸⁾	
RD3/PSP3	22	24	41	I/O	ST/TTL ⁽⁸⁾	
RD4/PSP4	27	30	2	I/O	ST/TTL ⁽⁸⁾	
RD5/PSP5	28	31	3	I/O	ST/TTL ⁽⁸⁾	
RD6/PSP6	29	32	4	I/O	ST/TTL ⁽⁸⁾	
RD7/PSP7	30	33	5	I/O	ST/TTL ⁽⁸⁾	
RE0/ \overline{RD} /AN5	8	9	25	I/O	ST/TTL ⁽⁸⁾	<p>PORTE is a bi-directional I/O port.</p> <p>RE0 can also be read control for the parallel slave port, or analog input5.</p> <p>RE1 can also be write control for the parallel slave port, or analog input6.</p> <p>RE2 can also be select control for the parallel slave port, or analog input7.</p>
RE1/ \overline{WR} /AN6	9	10	26	I/O	ST/TTL ⁽⁸⁾	
RE2/ \overline{CS} /AN7	10	11	27	I/O	ST/TTL ⁽⁸⁾	
V _{ss}	12,31	13,34	6,29	P	—	Ground reference for logic and I/O pins.
V _{cc}	11,32	12,35	7,28	P	—	Positive supply for logic and I/O pins.
NC	—	1,17,28,40	12,13,33,34		—	These pins are not internally connected. These pins should be left unconnected.

f) Descrierea setului de instrucțiuni:

Mnemonic, Operands	Description	Cycles	14-Bit Opcode				Status Affected	Notes	
			MSb		LSb				
BYTE-ORIENTED FILE REGISTER OPERATIONS									
ADDWF	f, d	Add W and f	1	00	0111	dfff	ffff	C,DC,Z	1,2
ANDWF	f, d	AND W with f	1	00	0101	dfff	ffff	Z	1,2
CLRF	f	Clear f	1	00	0001	1fff	ffff	Z	2
CLRWF	-	Clear W	1	00	0001	0xxx	xxxx	Z	
COMF	f, d	Complement f	1	00	1001	dfff	ffff	Z	1,2
DECF	f, d	Decrement f	1	00	0011	dfff	ffff	Z	1,2
DECFSZ	f, d	Decrement f, Skip if 0	1 (2)	00	1011	dfff	ffff		1,2,3
INCF	f, d	Increment f	1	00	1010	dfff	ffff	Z	1,2
INCFSZ	f, d	Increment f, Skip if 0	1 (2)	00	1111	dfff	ffff		1,2,3
IORWF	f, d	Inclusive OR W with f	1	00	0100	dfff	ffff	Z	1,2
MOVF	f, d	Move f	1	00	1000	dfff	ffff	Z	1,2
MOVWF	f	Move W to f	1	00	0000	1fff	ffff		
NOP	-	No Operation	1	00	0000	0xx0	0000		
RLF	f, d	Rotate Left f through Carry	1	00	1101	dfff	ffff	C	1,2
RRF	f, d	Rotate Right f through Carry	1	00	1100	dfff	ffff	C	1,2
SUBWF	f, d	Subtract W from f	1	00	0010	dfff	ffff	C,DC,Z	1,2
SWAPF	f, d	Swap nibbles in f	1	00	1110	dfff	ffff		1,2
XORWF	f, d	Exclusive OR W with f	1	00	0110	dfff	ffff	Z	1,2
BIT-ORIENTED FILE REGISTER OPERATIONS									
BCF	f, b	Bit Clear f	1	01	00bb	bfff	ffff		1,2
BSF	f, b	Bit Set f	1	01	01bb	bfff	ffff		1,2
BTFSC	f, b	Bit Test f, Skip if Clear	1 (2)	01	10bb	bfff	ffff		3
BTFSS	f, b	Bit Test f, Skip if Set	1 (2)	01	11bb	bfff	ffff		3
LITERAL AND CONTROL OPERATIONS									
ADDLW	k	Add literal and W	1	11	111x	kkkk	kkkk	C,DC,Z	
ANDLW	k	AND literal with W	1	11	1001	kkkk	kkkk	Z	
CALL	k	Call subroutine	2	10	0kkk	kkkk	kkkk		
CLRWDT	-	Clear Watchdog Timer	1	00	0000	0110	0100	$\overline{TO}, \overline{PD}$	
GOTO	k	Go to address	2	10	1kkk	kkkk	kkkk	Z	
IORLW	k	Inclusive OR literal with W	1	11	1000	kkkk	kkkk		
MOVLW	k	Move literal to W	1	11	00xx	kkkk	kkkk		
RETFIE	-	Return from interrupt	2	00	0000	0000	1001		
RETLW	k	Return with literal in W	2	11	01xx	kkkk	kkkk		
RETURN	-	Return from Subroutine	2	00	0000	0000	1000		
SLEEP	-	Go into standby mode	1	00	0000	0110	0011	$\overline{TO}, \overline{PD}$	
SUBLW	k	Subtract W from literal	1	11	110x	kkkk	kkkk	C,DC,Z	
XORLW	k	Exclusive OR literal with W	1	11	1010	kkkk	kkkk	Z	

Descrierea funcțională a sistemului de control:

Este definit sistemul de control implementat în baza MCU PIC16F877 (Figura 1). Sistemul include semnalele analogice de intrare AN[0...7] și semnalele discrete de ieșire RB[0...7], RC[0...7], RD[0...7].

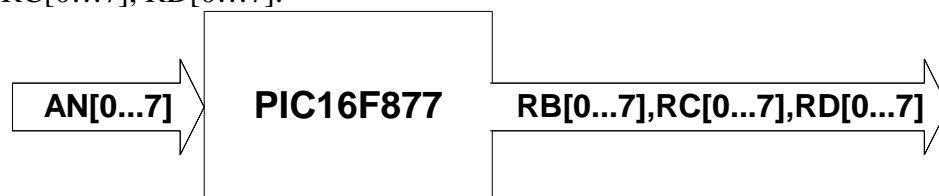


Figura 1.

- Să se elaboreze schema bloc a algoritmului de realizare a funcției de control **F**.
- Să se elaboreze programul în mediul **IDE microC for PIC** care realizează funcția de control **F**

$$F = \begin{cases} RB.0 = 1 \left[(AN.0 \leq AN.1) \right], \\ RB.1 = 1 \left[\left(\sum_{t=0}^T (\Delta AN.2) \geq AN.3 \right) \right], \\ RB.2 = 1, (\Delta t = 50ms) \left[(AN.0 \geq AN.3) \right], \\ RB.4 = 1, (\Delta t = 40ms) \left[(RB.1 + RB.2) * (RB.2 \vee \overline{RB.0}) \right], \\ RC.1 = 1 \left[(RB.0 + RB.2) \right]. \end{cases}$$

unde: Δt este timpul de întârziere a semnalului de control după îndeplinirea condiției menționate în [...]; $\Delta = \frac{du}{dt}$ - variația tensiunii de intrare în timp; AN – semnale analogice de intrare.

c) Să se elaboreze programul în mediul **IDE microC for PIC** care realizează funcția de control **F** cu filtrarea semnalelor analogice de intrare.

$$F = \begin{cases} RB.0 = 1 \left[(AN^*.0 \leq AN^*.1) \right], \\ RB.1 = 1 \left[\left(\sum_{t=0}^T (\Delta AN^*.2) \geq AN^*.3 \right) \right], \\ RB.2 = 1, (\Delta t = 50ms) \left[(AN^*.0 \geq AN^*.3) \right], AN^* = \frac{(AN_{t-1} + AN_t)}{2} \\ RB.4 = 1, (\Delta t = 40ms) \left[(RB.1 + RB.2) * (RB.2 \vee \overline{RB.0}) \right], \\ RC.1 = 1 \left[(RB.0 + RB.2) \right]. \end{cases}$$

Simularea funcțională a programului:

a) Rezultatul compilării programului ce realizează funcția de control **F** se verifică în mediul de simulare **PIC Simulator IDE**.

b) Rezultatul compilării programului ce realizează funcția de control **F** se verifică în mediul de proiectare **ISIS Proteus**.